



Wooden Easle

Installation Instructions for
Wooden Easle

Tools Needed

- Tape Measure
- Safety Glasses
- Safety Gloves
- Screwdriver
- Drill
- Level

Hardware Needed

- All parts included

Installation

1. Align accessory tray with pre-drilled hole in chalk tray and insert 4" screws through the hole. Attached wing nut to end and do not tighten. See figure 1.
2. Get together the 3 upper legs and insert 2 ½" screw through all 3. Attach wing nut and tighten. See figure 2.
3. Attach 2 lower legs to upper legs. Do the outside legs first. Use 1 ¾" screws. Attach wing nut and tighten. Then attached middle leg and add safety chain. Attach wing nut and tighten. See figure 3.
4. Add chalk tray (figure 1) to front leg assembly tilting tray at a 45 degree angle sliding one leg at a time. Then rotate until straight. See figure 4.
5. With tray in position loosen wing nut and remove. Insert loose end through chain and tighten.
6. Tighten all wing nuts. Do not use tools. Hand tighten only.

Figure 1

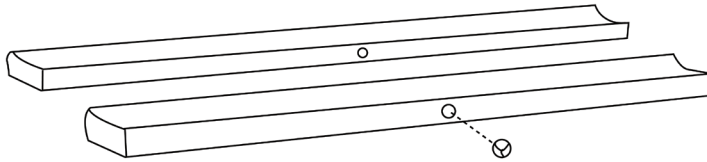


Figure 2

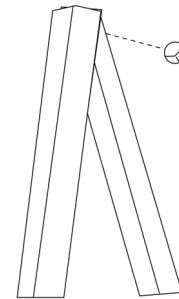


Figure 3


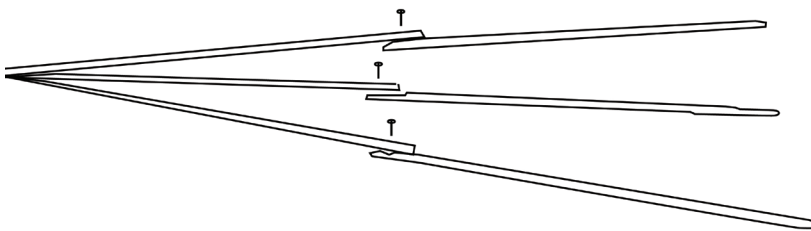


Figure 4

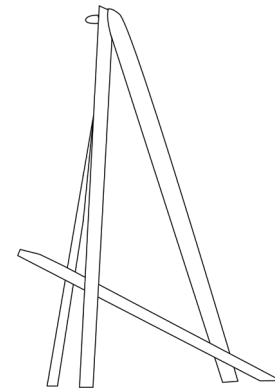

Parts Included

DESCRIPTION	QUANTITY
4" Screw	1
2 ½" Screw	1
Wing Nut	5
1 ¾" Screws	3
Chalk Tray	1
Safety Chain	1
Accessory Tray	1
Upper Front Legs	2
Upper Rear Leg	1
Lower Legs	3